

Suspensión -Techo Pendant-Ceiling Suspension-Plafond
Polaris

Polaris
Comfortable and efficient workspaces

Polaris es una luminaria con iluminación Up & Down especial para oficinas y y espacios de trabajo. Gracias a la colocación retranqueada de su difusor microprismático se reduce el índice de deslumbramiento favoreciendo el confort visual y el bienestar en espacios de trabajo. Polaris aloja la fuente de alimentación en el interior optimizando el espacio de la instalación. Se puede encontrar en 1200mm, 1500mm y 200mm de largo. Diseñado y producido en España.

Polaris is a luminaire with Up & Down lighting especially for offices and workspaces. Thanks to the recessed positioning of its micro-prismatic diffuser, the glare index is reduced, favouring visual comfort and well-being in workspaces. Polaris houses the power supply inside the luminaire, optimising the installation space. It is available in 1200mm, 1500mm and 200mm lengths. Designed and produced in Spain.

Polaris est un luminaire à éclairage Up & Down spécialement conçu pour les bureaux et les espaces de travail. Grâce au positionnement en retrait de son diffuseur microprismatique, l'indice d'éblouissement est réduit, ce qui favorise le confort visuel et le bien-être dans les espaces de travail. Polaris abrite l'alimentation électrique à l'intérieur, optimisant ainsi l'espace d'installation. Il est disponible en longueurs de 1200 mm, 1500 mm et 200 mm. Conçu et produit en Espagne.

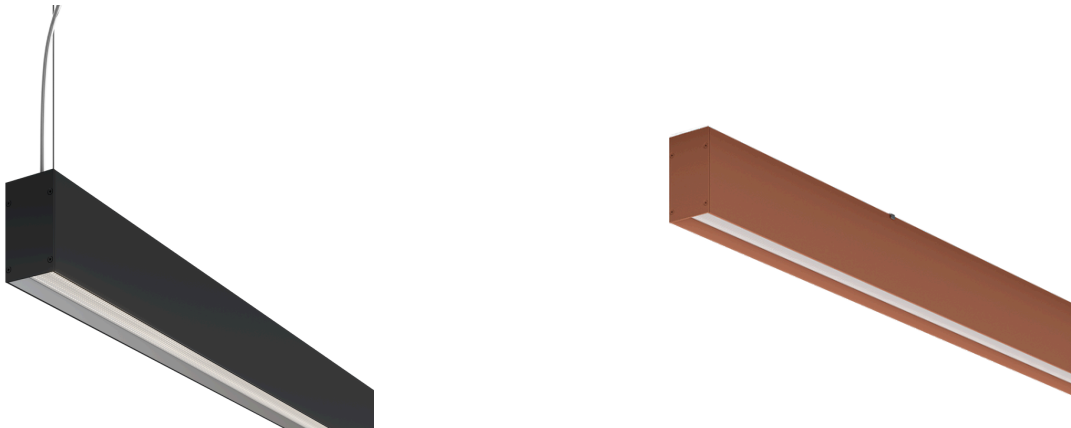


Table with 12 columns: IP (20), CRI (>90), R9 (>25), K (2700), K (3000), K (4000), Warranty (5 years), MacAdams (3 Steps), Life time (50.000h), Power Supply (Included), Profile Material (AL6060), Diffuser Material (PC). Below the table are icons for beam angle (80°), voltage (VAC 230), finish (F), and microprismatic diffuser.


Características técnicas
Technical data

Table with 2 columns: Specification and Value. Rows include: Medidas Dimensions (45 x 76mm), Longitud Length (1200 / 1500 /2000mm), Material perfil Profile material (AL6060), Material difusor Diffuser material (Policarbonato Polycarbonate), CCT (3000 x 4000mm), CRI (>90), R9 (>25), Vida útil Life time (50.000h), IP (20), Eficiencia Energetica Energetic efficiency (F), Pasos MacAdams MacAdams steps (3), Angulo Beam angle (80°), Clase Class (II), Temperatura de trabajo Working temperature (-20~50°C), Temperatura de almacenamiento Storage temperature (-40~80°C).



Suspensión -Techo Pendant-Ceiling Suspension-Plafond
Polaris

Lectura de las referencias inteligentes Reading smart references Lire des références intelligentes

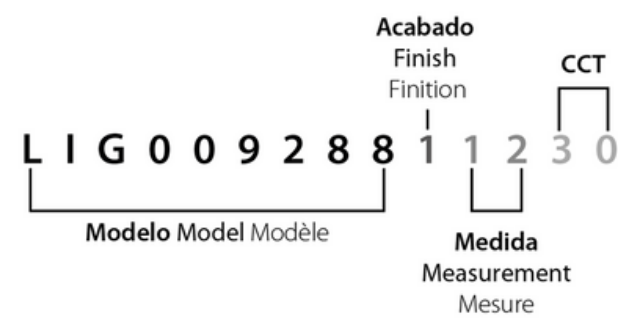

Suspensión Pendant Suspension

Up&Down

Modelo Model Modèle	Acabado Finish Finition	Medidas Measurement Mesure	CCT	Lm	W	Diffuser
LIG0362881122707	● 1 Plata mate Matt silver Argent mat	12 1203mm	27 2700K	7049	64,8	07 Mate UP/ Mate Down
LIG0362881123007			30 3000K	7193	64,8	07 Mate UP/ Mate Down
LIG0362881124007			40 4000K	7776	64,8	07 Mate UP/ Mate Down
LIG0362881122709	● 1 Plata mate Matt silver Argent mat	12 1203mm	27 2700K	7049	64,8	09 Mate UP/ Micro Down
LIG0362881123009			30 3000K	7193	64,8	09 Mate UP/ Micro Down
LIG0362881124009			40 4000K	7776	64,8	09 Mate UP/ Micro Down
LIG0362881122707	● 1 Plata mate Matt silver Argent mat	15 1503mm	27 2700K	8929	82,1	07 Mate UP/ Mate Down
LIG0362881123007			30 3000K	9111	82,1	07 Mate UP/ Mate Down
LIG0362881124007			40 4000K	9850	82,1	07 Mate UP/ Mate Down
LIG0362881122709	● 1 Plata mate Matt silver Argent mat	15 1503mm	27 2700K	8929	82,1	09 Mate UP/ Micro Down
LIG0362881123009			30 3000K	9111	82,1	09 Mate UP/ Micro Down
LIG0362881124009			40 4000K	9850	82,1	09 Mate UP/ Micro Down
LIG0362881122707	● 1 Plata mate Matt silver Argent mat	20 2003mm	27 2700K	12062	110,9	07 Mate UP/ Mate Down
LIG0362881123007			30 3000K	12308	110,9	07 Mate UP/ Mate Down
LIG0362881124007			40 4000K	13306	110,9	07 Mate UP/ Mate Down
LIG0362881122709	● 1 Plata mate Matt silver Argent mat	20 2003mm	27 2700K	12062	110,9	09 Mate UP/ Micro Down
LIG0362881123009			30 3000K	12308	110,9	09 Mate UP/ Micro Down
LIG0362881124009			40 4000K	13306	110,9	09 Mate UP/ Micro Down
LIG0362882122707	○ 2 Blanco White Blanc	12 1203mm	27 2700K	7049	64,8	07 Mate UP/ Mate Down
LIG0362882123007			30 3000K	7193	64,8	07 Mate UP/ Mate Down
LIG0362882124007			40 4000K	7776	64,8	07 Mate UP/ Mate Down
LIG0362882122709	○ 2 Blanco White Blanc	12 1203mm	27 2700K	7049	64,8	09 Mate UP/ Micro Down
LIG0362882123009			30 3000K	7193	64,8	09 Mate UP/ Micro Down
LIG0362882124009			40 4000K	7776	64,8	09 Mate UP/ Micro Down
LIG0362882152707	○ 2 Blanco White Blanc	15 1503mm	27 2700K	8929	82,1	07 Mate UP/ Mate Down
LIG0362882153007			30 3000K	9111	82,1	07 Mate UP/ Mate Down
LIG0362882153007			40 4000K	9850	82,1	07 Mate UP/ Mate Down
LIG0362882152709	○ 2 Blanco White Blanc	15 1503mm	27 2700K	8929	82,1	09 Mate UP/ Micro Down
LIG0362882153009			30 3000K	9111	82,1	09 Mate UP/ Micro Down
LIG0362882153009			40 4000K	9850	82,1	09 Mate UP/ Micro Down
LIG0362881202707	○ 2 Blanco White Blanc	20 2003mm	27 2700K	12062	110,9	07 Mate UP/ Mate Down
LIG0362881203007			30 3000K	12308	110,9	07 Mate UP/ Mate Down
LIG0362881204007			40 4000K	13306	110,9	07 Mate UP/ Mate Down
LIG0362881202709	○ 2 Blanco White Blanc	20 2003mm	27 2700K	12062	110,9	09 Mate UP/ Micro Down
LIG0362881203009			30 3000K	12308	110,9	09 Mate UP/ Micro Down
LIG0362881204009			40 4000K	13306	110,9	09 Mate UP/ Micro Down

Polaris

Up&Down

Modelo	Model	Modèle	Acabado	Finish	Finition	Medidas	Mesurement	Mesure	CCT	Lm	W	Diffuser			
LIG0362883122707			● 3	Negro	Black	Noir	12	1203mm	27	2700K	7049	64,8	07	Mate UP/	Mate Down
LIG0362883123007									30	3000K	7193	64,8	07	Mate UP/	Mate Down
LIG0362883123007									40	4000K	7776	64,8	07	Mate UP/	Mate Down
LIG0362883122709			● 3	Negro	Black	Noir	12	1203mm	27	2700K	7049	64,8	09	Mate UP/	Micro Down
LIG0362883123009									30	3000K	7193	64,8	09	Mate UP/	Micro Down
LIG0362883123009									40	4000K	7776	64,8	09	Mate UP/	Micro Down
LIG0362883152707			● 3	Negro	Black	Noir	15	1503mm	27	2700K	8929	82,1	07	Mate UP/	Mate Down
LIG0362883153007									30	3000K	9111	82,1	07	Mate UP/	Mate Down
LIG0362883153007									40	4000K	9850	82,1	07	Mate UP/	Mate Down
LIG0362883152709			● 3	Negro	Black	Noir	15	1503mm	27	2700K	8929	82,1	09	Mate UP/	Micro Down
LIG0362883153009									30	3000K	9111	82,1	09	Mate UP/	Micro Down
LIG0362883153009									40	4000K	9850	82,1	09	Mate UP/	Micro Down
LIG0362883202707			● 3	Negro	Black	Noir	20	2003mm	27	2700K	12062	110,9	07	Mate UP/	Mate Down
LIG0362883203007									30	3000K	12308	110,9	07	Mate UP/	Mate Down
LIG0362883204007									40	4000K	13306	110,9	07	Mate UP/	Mate Down
LIG0362883202709			● 3	Negro	Black	Noir	20	2003mm	27	2700K	12062	110,9	09	Mate UP/	Micro Down
LIG0362883203009									30	3000K	12308	110,9	09	Mate UP/	Micro Down
LIG0362883204009									40	4000K	13306	110,9	09	Mate UP/	Micro Down

Down

Modelo	Model	Modèle	Acabado	Finish	Finition	Medidas	Mesurement	Mesure	CCT	Lm	W	Diffuser				
LIG0362881122702			● 1	Plata	mate	Matt silver	Argent	mat	12	1203mm	27	2700K	3603	33,1	02	Mate Down
LIG0362881123002											30	3000K	3676	33,1	02	Mate Down
LIG0362881124002											40	4000K	3974	33,1	02	Mate Down
LIG0362881122704			● 1	Plata	mate	Matt silver	Argent	mat	12	1203mm	27	2700K	3603	33,1	04	Microprismatic Down
LIG0362881123004											30	3000K	3676	33,1	04	Microprismatic Down
LIG0362881124004											40	4000K	3974	33,1	04	Microprismatic Down
LIG0362881152702			● 1	Plata	mate	Matt silver	Argent	mat	15	1503mm	27	2700K	4543	41,8	02	Mate Down
LIG0362881153002											30	3000K	4635	41,8	02	Mate Down
LIG0362881154002											40	4000K	5011	41,8	02	Mate Down
LIG0362881152704			● 1	Plata	mate	Matt silver	Argent	mat	15	1503mm	27	2700K	4543	41,8	04	Microprismatic Down
LIG0362881153004											30	3000K	4635	41,8	04	Microprismatic Down
LIG0362881154004											40	4000K	5011	41,8	04	Microprismatic Down
LIG0362881202702			● 1	Plata	mate	Matt silver	Argent	mat	20	2003mm	27	2700K	6109	56,2	02	Mate Down
LIG0362881203002											30	3000K	6234	56,2	02	Mate Down
LIG0362881204002											40	4000K	6739	56,2	02	Mate Down
LIG0362881202704			● 1	Plata	mate	Matt silver	Argent	mat	20	2003mm	27	2700K	6109	56,2	04	Microprismatic Down
LIG0362881203004											30	3000K	6234	56,2	04	Microprismatic Down
LIG0362881204004											40	4000K	6739	56,2	04	Microprismatic Down
LIG0362882122702			○ 2	Blanco	White	Blanc			12	1203mm	27	2700K	3603	33,1	02	Mate Down
LIG0362882123002											30	3000K	3676	33,1	02	Mate Down
LIG0362882124002											40	4000K	3974	33,1	02	Mate Down
LIG0362882122704			○ 2	Blanco	White	Blanc			12	1203mm	27	2700K	3603	33,1	04	Microprismatic Down
LIG0362882123004											30	3000K	3676	33,1	04	Microprismatic Down
LIG0362882124004											40	4000K	3974	33,1	04	Microprismatic Down
LIG0362882152702			○ 2	Blanco	White	Blanc			15	1503mm	27	2700K	4543	41,8	02	Mate Down
LIG0362882153002											30	3000K	4635	41,8	02	Mate Down
LIG0362882154002											40	4000K	5011	41,8	02	Mate Down
LIG0362882152704			○ 2	Blanco	White	Blanc			15	1503mm	27	2700K	4543	41,8	04	Microprismatic Down
LIG0362882153004											30	3000K	4635	41,8	04	Microprismatic Down
LIG0362882154004											40	4000K	5011	41,8	04	Microprismatic Down
LIG0362882152702			○ 2	Blanco	White	Blanc			20	2003mm	27	2700K	6109	56,2	02	Mate Down
LIG0362882153002											30	3000K	6234	56,2	02	Mate Down
LIG0362882154002											40	4000K	6739	56,2	02	Mate Down
LIG0362882202704			○ 2	Blanco	White	Blanc			20	2003mm	27	2700K	6109	56,2	04	Microprismatic Down
LIG0362882203004											30	3000K	6234	56,2	04	Microprismatic Down
LIG0362882204004											40	4000K	6739	56,2	04	Microprismatic Down

IP	CRI	R9	K	K	K		80° 80°	80°	VAC			MADE IN SPAIN	CE	RoHS	Warranty	MacAdams	Life time	Power Supply	Profile Material
20	>90	>25	2700	3000	4000				230	F					5 years	3 Steps	50.000h	Included	AL6060

Suspensión -Techo Pendant-Ceiling Suspension-Plafond
Polaris

Suspensión Pendant Suspension
Down

Modelo Model Modèle	Acabado Finish Finition	Medidas Mesurement Mesure	CCT	Lm	W	Diffuser
LIG0362883122702	● 3 Negro Black Noir	12 1203mm	27 2700K	3603	33,1	02 Mate Down
LIG0362883123002			30 3000K	3676	33,1	02 Mate Down
LIG0362883124002			40 4000K	3974	33,1	02 Mate Down
LIG0362883122704	● 3 Negro Black Noir	12 1203mm	27 2700K	3603	33,1	04 Microprismatic Down
LIG0362883123004			30 3000K	3676	33,1	04 Microprismatic Down
LIG0362883124004			40 4000K	3974	33,1	04 Microprismatic Down
LIG0362883152702	● 3 Negro Black Noir	15 1503mm	27 2700K	4543	41,8	02 Mate Down
LIG0362883153002			30 3000K	4635	41,8	02 Mate Down
LIG0362883154002			40 4000K	5011	41,8	02 Mate Down
LIG0362883152704	● 3 Negro Black Noir	15 1503mm	27 2700K	4543	41,8	04 Microprismatic Down
LIG0362883153004			30 3000K	4635	41,8	04 Microprismatic Down
LIG0362883154004			40 4000K	5011	41,8	04 Microprismatic Down
LIG0362883202702	● 3 Negro Black Noir	20 2003mm	27 2700K	6109	56,2	02 Mate Down
LIG0362883203002			30 3000K	6234	56,2	02 Mate Down
LIG0362883204002			40 4000K	6739	56,2	02 Mate Down
LIG0362883202704	● 3 Negro Black Noir	20 2003mm	27 2700K	6109	56,2	04 Microprismatic Down
LIG0362883203004			30 3000K	6234	56,2	04 Microprismatic Down
LIG0362883204004			40 4000K	6739	56,2	04 Microprismatic Down

Techo Ceiling Plafound

Modelo Model Modèle	Acabado Finish Finition	Medidas Mesurement Mesure	CCT	Lm	W	Diffuser
LIG3362881122702	● 1 Plata mate Matt silver Argent mat	12 1203mm	27 2700K	3603	33,1	02 Mate Down
LIG3362881123002			30 3000K	3676	33,1	02 Mate Down
LIG3362881124002			40 4000K	3974	33,1	02 Mate Down
LIG3362881122704	● 1 Plata mate Matt silver Argent mat	12 1203mm	27 2700K	3603	33,1	04 Microprismatic Down
LIG3362881123004			30 3000K	3676	33,1	04 Microprismatic Down
LIG3362881124004			40 4000K	3974	33,1	04 Microprismatic Down
LIG3362881152702	● 1 Plata mate Matt silver Argent mat	15 1503mm	27 2700K	4543	41,8	02 Mate Down
LIG3362881153002			30 3000K	4635	41,8	02 Mate Down
LIG3362881154002			40 4000K	5011	41,8	02 Mate Down
LIG3362881152704	● 1 Plata mate Matt silver Argent mat	15 1503mm	27 2700K	4543	41,8	04 Microprismatic Down
LIG3362881153004			30 3000K	4635	41,8	04 Microprismatic Down
LIG3362881154004			40 4000K	5011	41,8	04 Microprismatic Down
LIG3362881202702	● 1 Plata mate Matt silver Argent mat	20 2003mm	27 2700K	6109	56,2	02 Mate Down
LIG3362881203002			30 3000K	6234	56,2	02 Mate Down
LIG3362881204002			40 4000K	6739	56,2	02 Mate Down
LIG3362881202704	● 1 Plata mate Matt silver Argent mat	20 2003mm	27 2700K	6109	56,2	04 Microprismatic Down
LIG3362881203004			30 3000K	6234	56,2	04 Microprismatic Down
LIG3362881204004			40 4000K	6739	56,2	04 Microprismatic Down
LIG3362882122702	○ 2 Blanco White Blanc	12 1203mm	27 2700K	3603	33,1	02 Mate Down
LIG3362882123002			30 3000K	3676	33,1	02 Mate Down
LIG3362882124002			40 4000K	3974	33,1	02 Mate Down
LIG3362882122704	○ 2 Blanco White Blanc	12 1203mm	27 2700K	3603	33,1	04 Microprismatic Down
LIG3362882123004			30 3000K	3676	33,1	04 Microprismatic Down
LIG3362882124004			40 4000K	3974	33,1	04 Microprismatic Down
LIG3362882152702	○ 2 Blanco White Blanc	15 1503mm	27 2700K	4543	41,8	02 Mate Down
LIG3362882153002			30 3000K	4635	41,8	02 Mate Down
LIG3362882154002			40 4000K	5011	41,8	02 Mate Down
LIG3362882152704	○ 2 Blanco White Blanc	15 1503mm	27 2700K	4543	41,8	04 Microprismatic Down
LIG3362882153004			30 3000K	4635	41,8	04 Microprismatic Down
LIG3362882154004			40 4000K	5011	41,8	04 Microprismatic Down
LIG3362882002702	○ 2 Blanco White Blanc	20 2003mm	27 2700K	6109	56,2	02 Mate Down
LIG3362882003002			30 3000K	6234	56,2	02 Mate Down
LIG3362882004002			40 4000K	6739	56,2	02 Mate Down
LIG3362882002704	○ 2 Blanco White Blanc	20 2003mm	27 2700K	6109	56,2	04 Microprismatic Down
LIG3362882003004			30 3000K	6234	56,2	04 Microprismatic Down
LIG3362882004004			40 4000K	6739	56,2	04 Microprismatic Down

IP: 20, CRI: >90, R9: >25, K: 2700, K: 3000, K: 4000, 80°, 80°, VAC: 230, F, Micro prismatic, MADE IN SPAIN, CE, RoHS, Warranty: 5 years, MacAdams: 3 Steps, Life time: 50.000h, Power Supply: Included, Profile Material: AL6060


Suspensión -Techo Pendant-Ceiling Suspension-Plafond
Polaris

Techo Ceiling Plafond


Modelo	Model	Modèle	Acabado	Finish	Finition	Medidas	Mesurement	Mesure	CCT	Lm	W	Diffuser
LIG3362883122702			● 3 Negro	Black	Noir	12	1203mm		27 2700K	3603	33,1	02 Mate Down
LIG3362883123002								30 3000K	3676	33,1	02 Mate Down	
LIG3362883124002								40 4000K	3974	33,1	02 Mate Down	
LIG3362883122704			● 3 Negro	Black	Noir	12	1203mm		27 2700K	3603	33,1	04 Microprismatic Down
LIG3362883123004								30 3000K	3676	33,1	04 Microprismatic Down	
LIG3362883124004								40 4000K	3974	33,1	04 Microprismatic Down	
LIG3362883152702			● 3 Negro	Black	Noir	15	1503mm		27 2700K	4543	41,8	02 Mate Down
LIG3362883153002								30 3000K	4635	41,8	02 Mate Down	
LIG3362883154002								40 4000K	5011	41,8	02 Mate Down	
LIG3362883152704			● 3 Negro	Black	Noir	15	1503mm		27 2700K	4543	41,8	04 Microprismatic Down
LIG3362883153004								30 3000K	4635	41,8	04 Microprismatic Down	
LIG3362883154004								40 4000K	5011	41,8	04 Microprismatic Down	
LIG3362883202702			● 3 Negro	Black	Noir	20	2003mm		27 2700K	6109	56,2	02 Mate Down
LIG3362883203002								30 3000K	6234	56,2	02 Mate Down	
LIG3362883204002								40 4000K	6739	56,2	02 Mate Down	
LIG0362883202704			● 3 Negro	Black	Noir	20	2003mm		27 2700K	6109	56,2	04 Microprismatic Down
LIG0362883203004								30 3000K	6234	56,2	04 Microprismatic Down	
LIG0362883204004								40 4000K	6739	56,2	04 Microprismatic Down	

Medidas Dimensions Dimensions

Suspensión Pendant Suspension

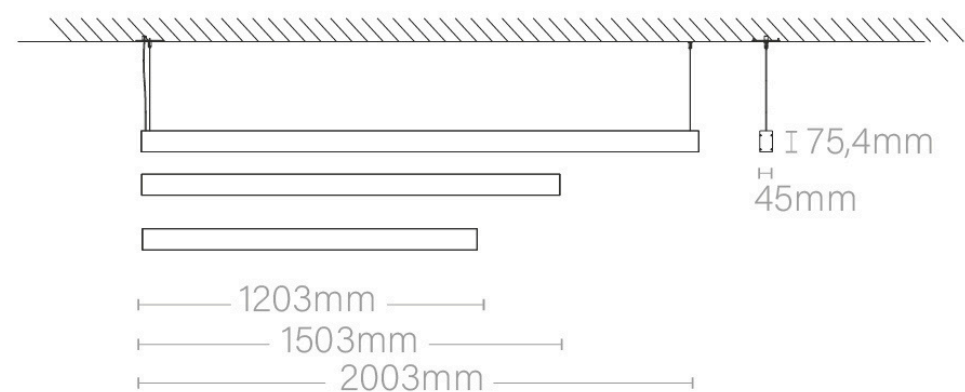

Pared Wall Mur


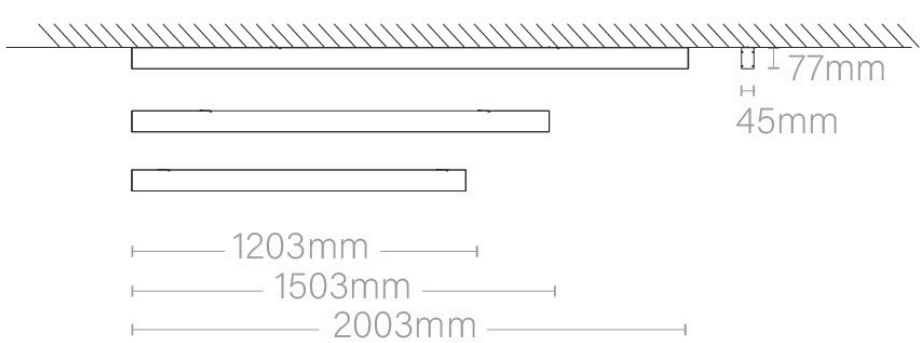


Suspensión -Techo Pendant-Ceiling Suspension-Plafond
Polaris

Distribución de la luz Reflector optic Distribution de la lumière

Suspensión Pendant Suspension

Techo Ceiling Plafond

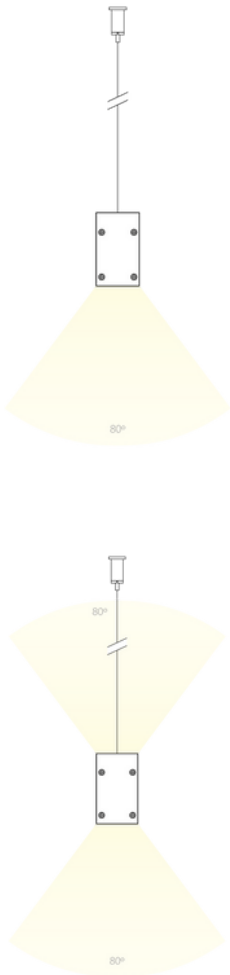

IP	CRI	R9	K	K	K				VAC			MADE IN SPAIN			Warranty	MacAdams	Life time	Power Supply	Profile Material
20	>90	>25	2700	3000	4000		80°	80°	230	F	Micro prismatic				5 years	3 Steps	50.000h	Included	AL6060